




NTN Machinery Manufacturing Co., Ltd

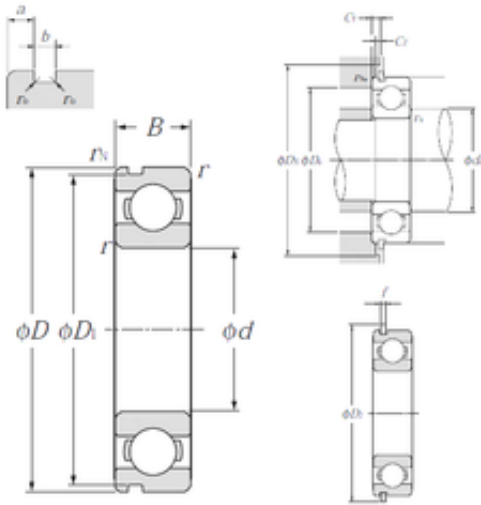

50 mm x 80 mm x 16 mm NTN 6010NR deep groove ball bearings

Bearing No. 6010NR

6010NR Bearing 2D drawings and 3D CAD models

Size	50x80x16 mm
Bore Diameter	50 mm
Outer Diameter	80 mm
Width	16 mm
d	50 mm
D	80 mm
B	16 mm
C	16 mm
rn	0,5 mm
a	2,49 mm
b	1,9 mm
f	1,7 mm
r min.	1 mm
r0 max.	0,6 mm
D1	76,81 mm
D2	86,6 mm
da min.	55 mm
da max	57,5 mm
Da max.	75 mm
ra max.	1 mm
Dx	88 mm
Cy	3,8 mm
Cz	1,7 mm
rn	0,5 mm
Weight	0,261 Kg



NTN Machinery Manufacturing Co., Ltd

Basic dynamic load rating (C)	21,8 kN
Basic static load rating (C0)	16,6 kN
(Grease) Lubrication Speed	8 400 r/min
(Oil) Lubrication Speed	9 800 r/min
a min	2.29 mm
a max	2.49 mm
Ca min	3.89 mm
Ca max	4.19 mm
rs min	1 mm
rNs min	0.5 mm
D3 max	76.81 mm
b min	1.9 mm
b max	2.2 mm
r0 max	0.6 mm
D4 max	86.6 mm
Snap ring reference	R80
Radial clearance class	CN
Mass	0.26 kg
Dynamic load, C	21.8 kN
Static load, C0	16.6 kN
Fatigue limit load, Cu	0.75 kN
f0	15.5
Nlim (oil)	9,800 rpm
Nlim (grease)	8,400 rpm
Min operating temperature, Tmin	-20 ° C
Max operating temperature, Tmax	120 ° C
Characteristic cage frequency, FTF	0.43 Hz
Characteristic rolling element frequency, BSF	7.31 Hz
Characteristic outer ring	6.06 Hz



NTN Machinery Manufacturing Co., Ltd

frequency, BPF0	
Characteristic inner ring frequency, BPF1	7.94 Hz
da min	55 mm
Da max	75 mm
ra max	1 mm
rNa max	0.5 mm
Db min	88 mm
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.25
EAN	4547359331882
Product Group	B00308
Enclosure	Open
Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	Yes
Internal Special Features	No
Cage Material	Steel
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	50MM Bore; 80MM Outside Diameter; 16MM Outer Race Diameter; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68



NTN Machinery Manufacturing Co., Ltd

Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.ntnamerica.com
Manufacturer Item Number	6010NR
Weight / LBS	0.552
Outside Diameter	3.15 Inch 80 Millimeter
Bore	1.969 Inch 50 Millimeter
Outer Race Width	0.63 Inch 16 Millimeter
bore diameter:	50 mm
finish/coating:	Uncoated
outside diameter:	80 mm
bearing material:	High Carbon Chrome Steel
overall width:	16 mm
cage material:	Steel
bore type:	Round
inner ring width:	16 mm
closure type:	Open
outer ring width:	16 mm
row type & fill slot:	Single Row Non-Fill Slot
maximum rpm (grease):	8400 rpm
snap ring included:	With Snap Ring
maximum rpm (oil):	9800 rpm
internal clearance:	CN
fillet radius:	1 mm
operating temperature range:	-40 to 120 ° C
maximum rpm:	9800 RPM
dynamic load capacity:	21800 N
series:	60
static load capacity:	16600 N
manufacturer product page:	Click here
precision rating:	ISO Class 0



NTN Machinery Manufacturing Co., Ltd